WORK WRITE-UP

Splashpad Building - Macon County

Ext	erio		Meet or Exceed
	1)	Standard gable roof (stick built or truss) Shingle 3 tab	
	2)	Exterior - T 11 Siding	
	3)	Exterior grade double doors (front & back entrance)	11
nte	erior	_	
	<u>Wa</u> 1)	lls & Floors Interior Walls constructed with waterproof material - primed	
	2)	Brushed Concrete floors in all areas (with plumbing and floor drains)	
	3)	Monolithic slab	
	<u>Batl</u> 1)	nrooms Two ADA compliant Bathrooms with showers - Stalls with commercial grade doors	
	2)	Upper & Lower Wall Vents in Bathrooms	
	<u>Win</u> 1)	dows & Doors Framed opening (interior) for concession area	
	2)	Two (2) 35.5 in. x 35.5 in. Left-Hand Single Slider Vinyl Windows Dual Pane Insulated Glass, and Screen - White (as shown on diagram)	
	3)	Six Panel Steel interior doors (seven total)	
	4)	8' X 8' (or standard size) Manual Push Up roll up door for pump room	

1)	Pump / Filter room (20' X 16') including electrexhaust	ical with external	
2)	Water heater (50 gal capacity) in store room		
3)	All lights and fittings - contractor grade		
		TOTAL ESTIMATE:	
	SIGNATURE:		

<u>Other</u>

Addendum for Splashpad Building Write-Up

Meet or Exceed

Building Interior


Pump Room

*Successful bidder will need to coordinate with splashpad installer to accommodate a prefabricated fiberglass trough for connectivity to the pump room.

Concrete Slab between building & Splashpad: Approximately 650 sq ft Grade will be level with the building, sloping to Splashpad level.

Note: Building Dimensions are 36' X 30' on monolithic slab. See design attached



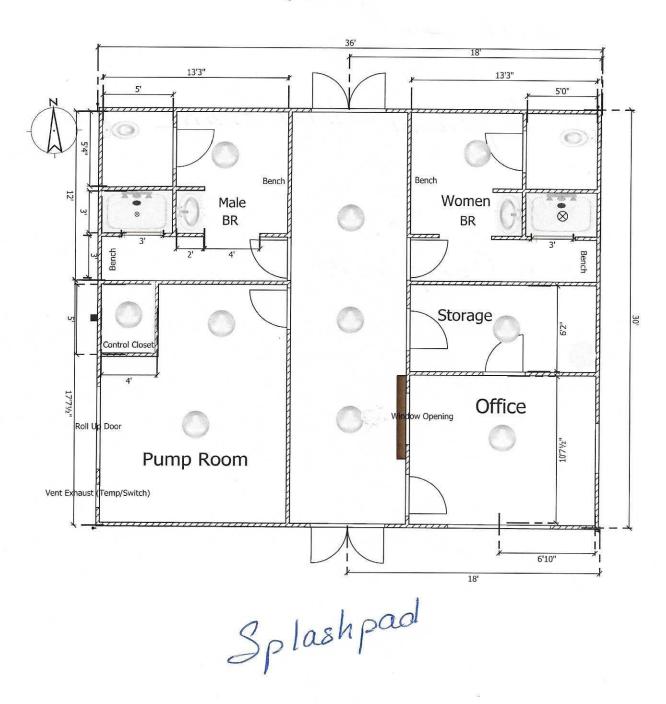

Designed by: David Parrott Jun 2, 2015